Installation instructions
for the decking removable clip

PEFC
10-31-2220

The SILVADEC decking removable clip can be used:
- to create access to a component located below the decking (seal, electrical connection block, etc.),
- to render the decking partially removable by inserting one or two rows of removable clips at regular intervals between 2 boards, instead of the single clips.
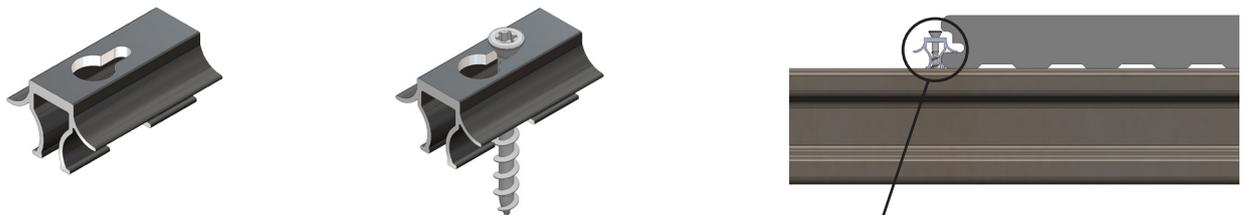
Tools required for fitting removable clips:
- Screw gun with standard Torx T15 bit
- ø3x35 mm screws (provided with the clip)

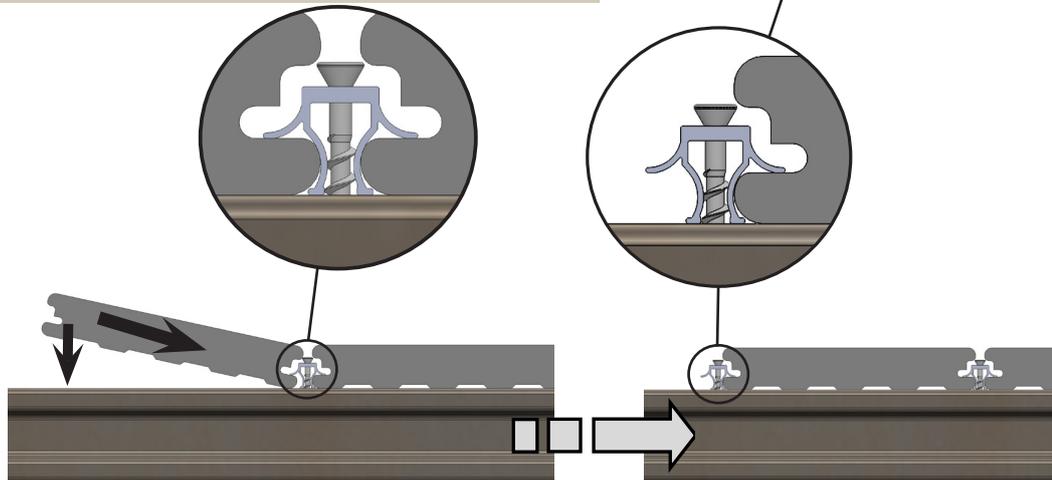**To install the bearers, refer to the SILVADEC decking board installation instructions (PU 7).**

IMPORTANT: The gap between the boards due to the removable clip is slightly different from the gap due to the single fastening clip. This may cause a slight offset between butted boards. Whatever clip you use, we strongly recommend refraining from forcing on it when fitting, to limit this offset.

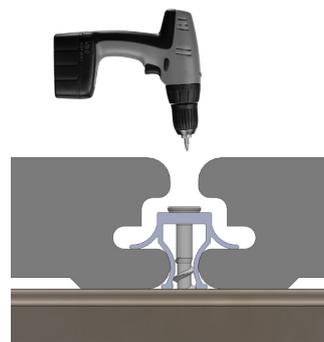## INSTALLING THE DECKING BOARDS WITH SILVADEC REMOVABLE CLIPS

Step 1: Pre-tighten the first row of clips (without fully screwing the screws into the clips)

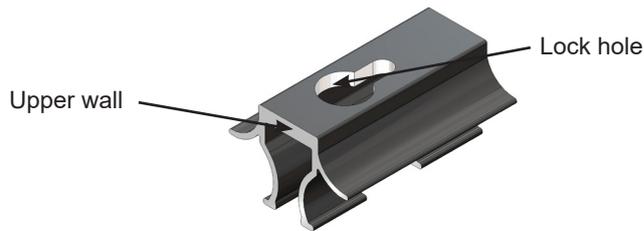Step 2: Insert the board and pre-tighten a second row of clips.
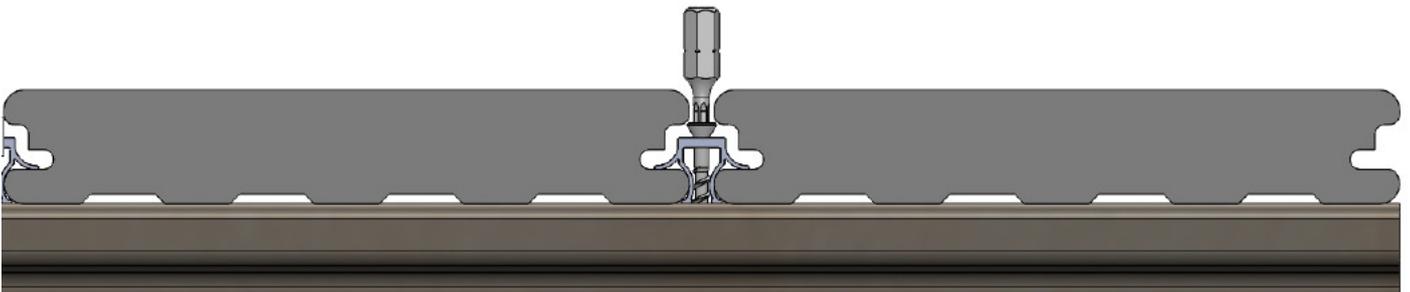
Step 3: Tighten the first row of clips fully.

Step 4: After inserting and fastening the next board using the standard single clip, tighten the second row of clips fully. Repeat these operations for each row of boards which must be removable.
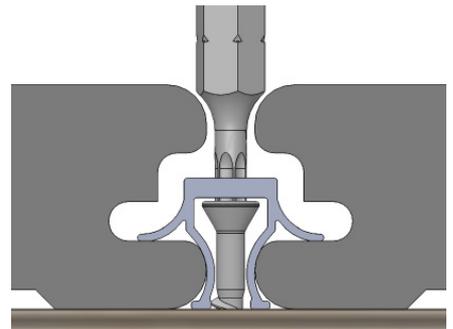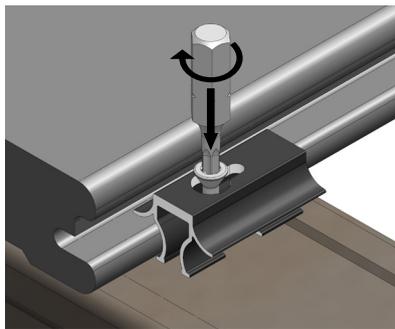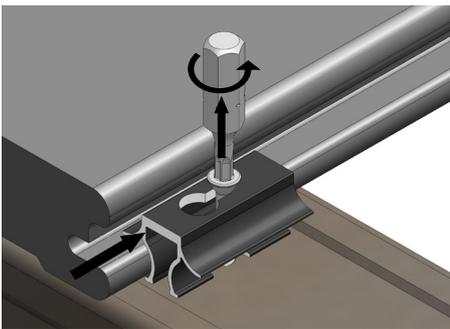
Lock hole

Upper wall

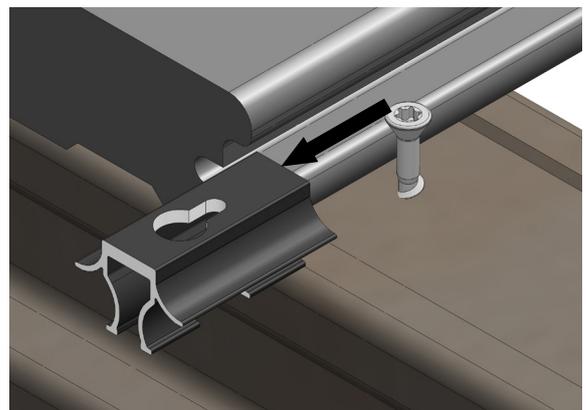The clip is designed so that the screw is accessible with a standard Torx T15 bit.

Step 1: Slightly loosen the clip and shift it to position the screw head above the "lock hole".

Step 2: Then screw the screw back in so that the head is below the upper wall of the clip.

Step 3: Shift the clip to the end of the board to remove it.

This will release the board. It can now be removed. To refit the board, perform these operations in reverse.

This version of the installation instructions may not be the most recent version to date. You can look up the latest version on our website www.silvadec.com.